

## MANUFAKTUR TOWER PLAIN TILE

- The tower plain tile: ideal for small roof areas such as towers and turrets, bay windows, canopies and parapets.
- Easy to install during renovation work thanks to its compact format, 140 x 280 x 14 mm

### TECHNICAL DATA

Size (appr.)	140 x 280 x 14 mm
Max. coverage width (approx.)	140 mm
Min. gauge (approx.)	95 mm
Covering length on av. approx.	105 mm
Max. gauge (approx.)	115 mm
Average tile requirement (approx.)	68 pcs/m <sup>2</sup>
Unit weight (approx.)	1.1 kg/piece
Weight per m <sup>2</sup> (approx.)	74.8 kg/m <sup>2</sup>
Weight per pallet (approx.)	773 kg
Pcs per mini-pack	10 piece
Pcs per pallet	640 piece




## APPLICATIONS

ADDITIONAL MEASURES ACCORDING TO CREATON MANUFACTURER'S SPECIFICATIONS	
Standard roof pitch CREATON DE in combination with additional measures according to manufacturer's specifications Standard roof pitch CREATON DE in combination with additional measures according to manufacturer's specifications	24 °
Installation of a trussing sheet/glued sub-roof without nail seals, possible CREATON products: DUO extra, DUO longlife ND extra, TRIO extra, QUATTRO longlife extra	≥ 24 °
Installation of a trussing sheet/glued sub-roof without nail seals, possible CREATON products: DUO longlife ND extra	≥ 22 °
Installation of a trussing sheet/glued sub-roof with nail seals, possible CREATON products: DUO extra, DUO longlife ND extra, TRIO extra, QUATTRO longlife extra	≥ 22 °
Installation as a rainproof sub-roof, possible CREATON products: DUO longlife ND extra, TRIO extra, QUATTRO longlife extra	≥ 18 °
Installation as a watertight sub-roof, possible CREATON products: QUATTRO longlife extra	≥ 10 °
Installation as a watertight sub-roof welded in a 7° special solution, please observe separate installation guidelines, possible CREATON products: QUATTRO longlife extra	-

## TECHNICAL INFORMATIONS


- The technical drawing shown is merely an example.
- According to the Central Association of the German Roofing Trade (ZVDH) rules for verge tiles, the distance between the inner edge of the verge lug and the outer edge of the gable wall or cladding must be at least 1 cm.
- Batten spacing / tile gauge is dependent on the roofing type and roof pitch.
- Current national rules and standards apply to the execution of roofing work. These vary from country to country (e.g. ZVDH Rules, Austrian Standards) and must be taken into consideration during execution. As manufacturer's information, CREATON-specific information about the execution of the sub-roof is also applicable and is complementary to these. You can find them in our Roof Planner or at [www.creaton.de](http://www.creaton.de) / [www.creaton.at](http://www.creaton.at).
- Please consider the sample letter for the standard CREATON roof pitches.



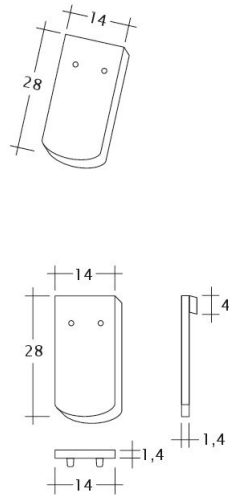

Drawing MANUFATUR TUBI-1-1

Dachquerschnitt bei Doppeldeckung. Entlüftung über Flächenlüfter LQ 10 cm<sup>2</sup>. Die Lüftung muss nach DIN 4108/3 mit folgenden freien Querschnitten versehen sein:  
 Zuluft 2 ‰, mind. 200 cm<sup>2</sup>  
 LQ Abluft 0,5 ‰, mind. 50 cm<sup>2</sup> der zugehörigen Dachfläche.

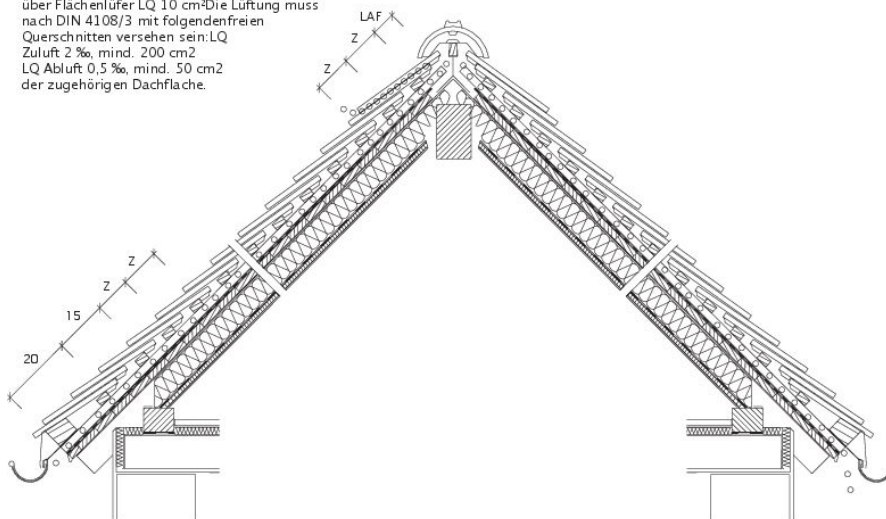

Drawing MANUFATUR roof cross-section Doppeldeckung-Luefter

