

PROFIL SAXONY PLAIN TILE 18X38X1.4

The plain tile with the profiled surface.

- Thanks to their distinctively profiled texture
- and differentiated colouring
- , they offer unique combination and design options
- and blend harmoniously into existing roofscapes

TECHNICAL DATA

| | |
|-------------------------------------|------------------------|
| Size (appr.) | 180 x 380 x 14 mm |
| Max. coverage width (approx.) | 180 mm |
| Min. gauge (approx.) | 145 mm |
| Covering length on av. approx. | 155 mm |
| Max. gauge (approx.) | 165 mm |
| Average tile requirement (approx.) | 36 pcs/m ² |
| Unit weight (approx.) | 1.9 kg/piece |
| Weight per m ² (approx.) | 68.4 kg/m ² |
| Weight per pallet (approx.) | 979 kg |
| Pcs per mini-pack | 8 piece |
| Pcs per pallet | 480 piece |




APPLICATIONS

| ADDITIONAL MEASURES ACCORDING TO CREATON MANUFACTURER'S SPECIFICATIONS | |
|--|--------|
| Standard roof pitch CREATON DE in combination with additional measures according to manufacturer's specifications Standard roof pitch CREATON DE in combination with additional measures according to manufacturer's specifications | 24 ° |
| Installation of a trussing sheet/glued sub-roof without nail seals, possible CREATON products: DUO extra, DUO longlife ND extra, TRIO extra, QUATTRO longlife extra | ≥ 24 ° |
| Installation of a trussing sheet/glued sub-roof without nail seals, possible CREATON products: DUO longlife ND extra | ≥ 22 ° |
| Installation of a trussing sheet/glued sub-roof with nail seals, possible CREATON products: DUO extra, DUO longlife ND extra, TRIO extra, QUATTRO longlife extra | ≥ 22 ° |
| Installation as a rainproof sub-roof, possible CREATON products: DUO longlife ND extra, TRIO extra, QUATTRO longlife extra | ≥ 18 ° |
| Installation as a watertight sub-roof, possible CREATON products: QUATTRO longlife extra | ≥ 10 ° |
| Installation as a watertight sub-roof welded in a 7° special solution, please observe separate installation guidelines, possible CREATON products: QUATTRO longlife extra | - |


TECHNICAL INFORMATIONS

- The technical drawing shown is merely an example.
- According to the Central Association of the German Roofing Trade (ZVDH) rules for verge tiles, the distance between the inner edge of the verge lug and the outer edge of the gable wall or cladding must be at least 1 cm.
- Current national rules and standards apply to the execution of roofing work. These vary from country to country (e.g. ZVDH Rules, Austrian Standards) and must be taken into consideration during execution. As manufacturer's information, CREATON-specific information about the execution of the sub-roof is also applicable and is complementary to these. You can find them in our Roof Planner or at www.creaton.de / www.creaton.at.
- Batten spacing / tile gauge is dependent on the roofing type and roof pitch.
- Please consider the sample letter for the standard CREATON roof pitches.




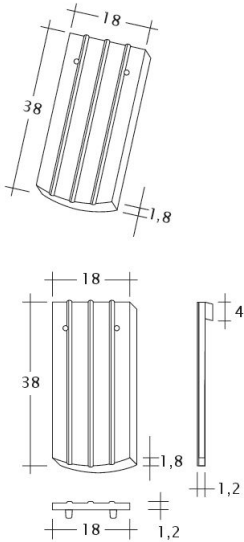


Drawing PROFIL Kera-Saechs-18cm-1-1


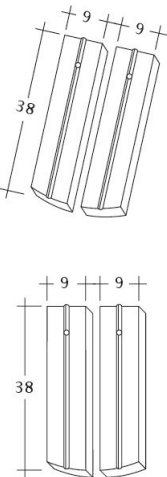


Drawing PROFIL Kera-Saechs-18cm-1-2






Drawing PROFIL Kera-Saechs-18cm-LUEFTZ



Drawing PROFIL Kera-Saechs-18cm-SchiebeOG



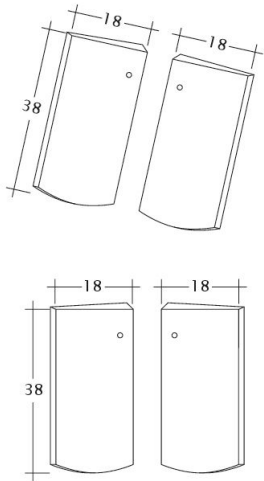

Drawing PROFIL Kera-Saechs-18cm-Unterlaeufer

